

PRODUCT MODEL NUMBER: TL-MC84-W DUAL BAND Wi-Fi ADAPTER



DISCLAIMER

No part of this document may be reproduced in any form without the written permission of the copyright owner. The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. TRANSLITE GLOBAL LLC shall have no liability for any error or damage of any kind resulting from the use of this document.

COPY WARNING

This document includes some confidential information. Its usage is limited to the owners of the product that it is relevant to. It cannot be copied, modified, or translated in another language without prior written authorization from TRANSLITE GLOBAL LLC.

PRODUCT OVERVIEW

TL-MC84-W Dual Band Wi-Fi Adapter: - In This adapter is based on MoCA[®] Home 2.5 technology. It can provide up to 2.5 Gbps actual data rates using the existing coaxial cabling in the home, supporting Wi-Fi connectivity to every room in the house without interference or performance degradation.

KEY FEATURES

- MoCA[®] 2.5 dual-band bundling technology, realizing 2.5Gbps throughput and indoor Wi-Fi coverage;
- Support 400~1675MHz frequency operation;
- Typical latency: 5ms;
- Support Wi-Fi 802.11b/g/n, 802.11ac, dual-band 2.4GHz and 5GHz, dual antenna 2*2 Wi-Fi;
- Support multiple SSID and fast switch.
- Fixed bandwidth limit: Support overall speed limit and port speed limit of the terminal.
- Supports up to 16 terminals depending on the level of attenuation.


SPECIFICATIONS

Basic Information	
Technical Standard	MoCA [®] 2.5 Standard
MoCA[®] Chipset	Maxlinear, MXL3710
Manufacturer/Model	
Wi-Fi Chipset	MTK, MT7620DA+MT7612E
Manufacturer/Model	

Communication Mode	
Modulation	OFDM
Sub-carrier Number	512*5 (maximum)
Sub-carrier Bandwidth	195.3125KHz
Sub-carrier Modulation	1024QAM
MAC Layer Protocol	TDMA/TDD
RF Parameter	
MoCA port	1125 ~ 1675 MHz
IN-OUT port	5 ~ 1675 MHz
Channel RF Bandwidth	100MHz*3、100MHz*4、100MHz*5
Typical Transmitting Power	+ 2 dBm
Receiving Sensitivity	-70 dBm
Insertion Loss	< 2 dB
Delay	
Typical	3ms
Maximum	5ms
NMS	
Fast Configuration NMS	WEB
Wi-Fi Parameter	
Operating Frequency	2.4GHz & 5GHz
Wireless Channel	2.4GHz Channel:1,2,3,4,5,6,7,8,9,10,11,12,13, 5GHz Channel:36,40,44,48,52,56,60,64,100, 104,108,112,116,120,124,128,132,136,140,144,149,153,157,161,165
Protocol	2.4G Channel: 802.11 b/g/n 5G Channel: 802.11 a/n/ac , supports 802.11k/r
Maximum Wireless Rate	2.4G WiFi: 2×2 (802.11n: 300Mbps) 5G WiFi: 2×2 (802.11ac: 866Mbps)
Throughput	2.4G WiFi: 180Mbps 5G WiFi: 350Mbps
Interface	
RF Interface Mode	Connector: F type, Female; Impedance: 75 Ohm
RF Interface	1MoCA [®] input/output port, 1 RF input/output port (CATV)
Ethernet Interface	1*RJ45,1*10/100/1000 1000BASE-T & 3 *10/100BASE-T ports
Power & Consumption	

Power Supply	DC 12V/1A, External Power Adapter
Power Consumption	< 10W
Security	
Grounding	Grounding resistance: <5Ω
Static-Protection	F head, Contact-Discharge 2KV, Air-Discharge 4KV
Dimension & Weight	
Dimension	152*110*37 mm (L×W×H)
Net Weight	< 300g

MECHANICAL DESIGN

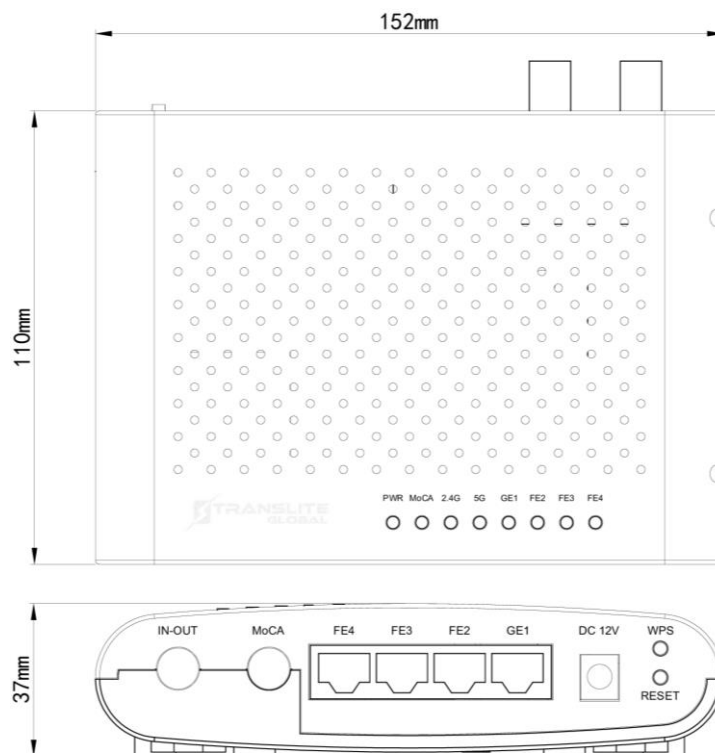

For Sales

North America:

sales@transliteglobal.com

Asia:

sales@translite.co.in

Rest Of The World:

sales@transliteglobal.com

For Support

North America:

support@transliteglobal.com

Asia:

support@translite.co.in

Rest Of The World:

support@transliteglobal.com