

PRODUCT MODEL NUMBER: TL-9242A 4-in-1 MPEG2/H.264 HD ENCODER



DISCLAIMER

No part of this document may be reproduced in any form without the written permission of the copyright owner. The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. TRANSLITE GLOBAL LLC shall have no liability for any error or damage of any kind resulting from the use of this document.

COPY WARNING

This document includes some confidential information. Its usage is limited to the owners of the product that it is relevant to. It cannot be copied, modified, or translated in another language without prior written authorization from TRANSLITE GLOBAL LLC.

PRODUCT OVERVIEW

TL-9242A 4-in-1 MPEG2/H.264 HD Encoder are TRANSLITE 's new professional HD audio & video encoding device with powerful functionality. It has equipped with 4 HD-SDI or 4 HDMI channels input supporting MPEG-2 and MPEG-4 AVC/H.264 video encoding and

MPEG-1 Audio layer 2, LC-AAC, HE-AAC and DD AC3 audio encoding. The 4 encoded programs will output through ASI and IP ports in MPTS or SPTS.


It adopts inner drawer-type structural design which greatly facilitates the change of encoding modules if needed.

KEY FEATURES

- Dual power supply
- MPEG2 HD/SD & MPEG4 AVC/H.264 HD/SD video encoding
- MPEG1 Audio Layer 2, LC-AAC, HE-AAC and DD AC3 audio encoding
- Support dialog normalization (applicable for DD AC3)
- 4*HD-SDI input or 4*HDMI input
- Support resolution downscale conversion
- Support VBR/CBR rate control mode
- Support CC (closed caption) EIA 608 & EIA 708 (for SDI input version)
- Support Low Latency function

- Support PSI/SI editing and inserting
- Supports IP null packet filter
- ASI output, IP (MPTS & 4 SPTS) output over UDP, RTP
- LCD display, Remote control and firmware
- Web-based NMS management; Updates via web

PRINCIPLE CHART

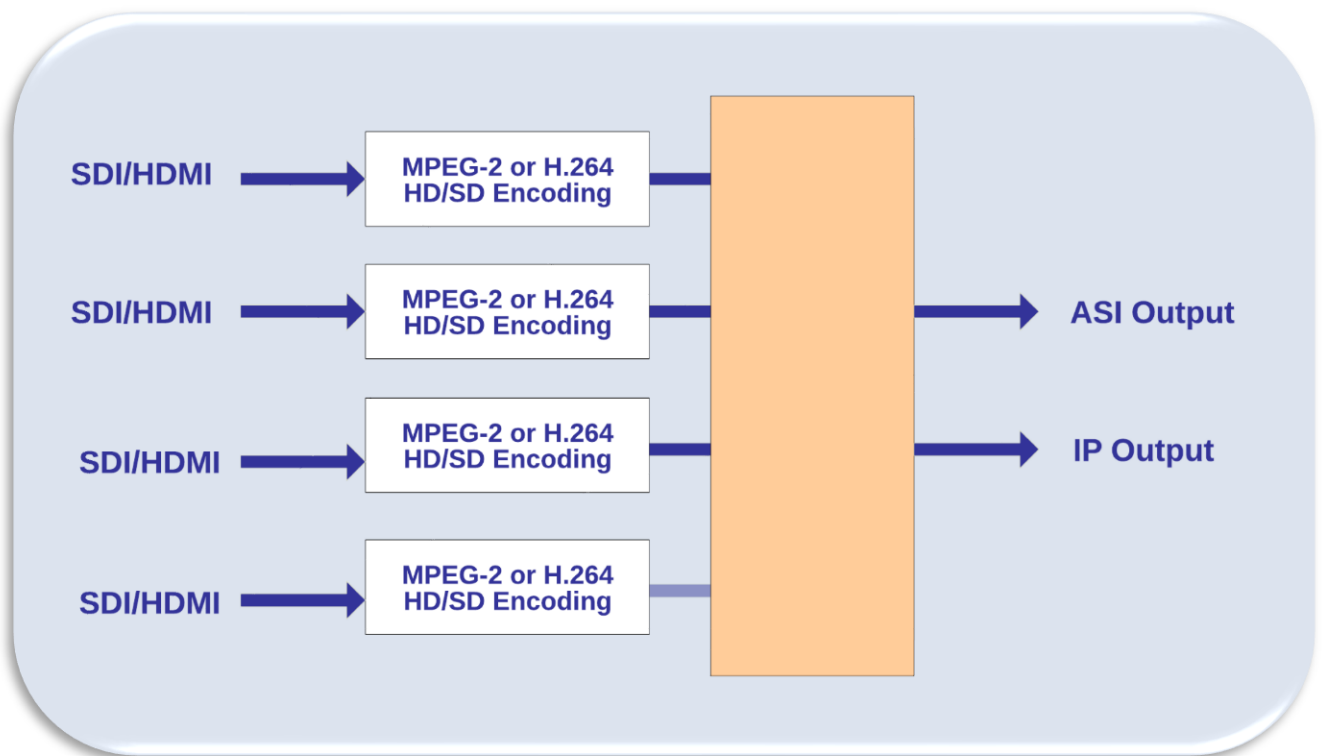

SPECIFICATIONS

Video	
Encoding	MPEG2 & MPEG4 AVC/H.264
Input	HD-SDI*4 or HDMI*4
Resolution	1920*1080_60P, 1920*1080_50P, (-for MPEG4 AVC/H.264 only) 1920*1080_60i, 1920*1080_50i, 1280*720_60p, 1280*720_50P 720*480_60i, 720*576_50i
Support object resolution	1920*1080_60P, 1920*1080_50P, (-for MPEG4 AVC/H.264 only) 1440*1080_60i, 1440*1080_50i, 1280*720_60p, 1280*720_50P 720*480_60i, 720*576_50i 720*480_60p, 720*480_30p, 720*480_25p 720*576_50p, 720*576_30p, 720*576_25p,
Bit Rate	0.5~19.5Mbps
Rate Control Mode	CBR/VBR
Chroma Sample	4:2:0
Aspect Ratio	16:9, 4:3
Audio	
Encoding	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC, Dolby Digital AC3 (2.0)
Dialog Normalization (Applicable for DD AC3 encoding only)	-31 ~ -1 dB
Sample rate	48KHz
Bit rate	64kbps, 96kbps, 128kbps, 192kbps, 256kbps, 320kbps
System	
Local interface	LCD + control buttons
Remote management	Web NMS
Low Latency Mode	Normal, mode 1, mode 2
Output	2*ASI out (BNC type); IP (1 MPTS & 4 SPTS) over UDP, RTP (RJ45, 100M)
NMS interface	RJ45, 100M
Language	English

General	
Power	AC 100V~240V, 45W
Dimensions	482*400*44mm
Weight	4.5 kgs
Operation temperature	0~45°C

For Sales

North America:

sales@transliteglobal.com

Asia:

sales@translite.co.in

Rest Of The World:

sales@transliteglobal.com

For Support

North America :

support@transliteglobal.com

Asia:

support@translite.co.in

Rest Of The World:

support@transliteglobal.com